




## IP68 Quick waterproof connector



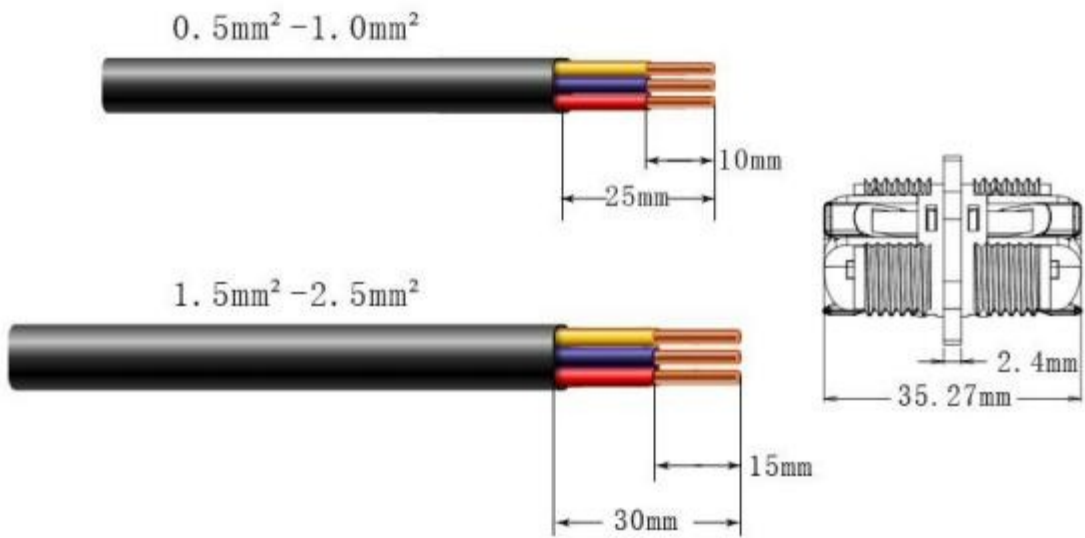


Refer to stripping length



Technical data		
Model		
Material	UL94V-2 Fire and flame retardant	
Rated power	IEC/NSW:24A 450VAC ETL:10A 300VAC	
IP code	IP68	
Terminal	2P/3P	
Working	T105	
Rated connecting capacity	Australia:0.5 ~ 2.5mm <sup>2</sup>	
seal plug		
plug aperture	8mm	11mm
Available cable diameter (Rubber round cable)	2*M20(4-8mm)	2*M20(6- 11mm)
Testing	20M 150hours	
Refer to stripping length	10mm ( 0.5~ 1.0mm <sup>2</sup> ) 15mm ( 1.5~2.5mm <sup>2</sup> )	
Product Size	76.95mm*25.02mm ( Refer to actual drawing )	
Certification	ENEC,CE,CB,UKCA,ETL,NSW,ROHS	
Quality Assurance	one year	

Application	Underwater(fresh water)  Underground
<p>Mark: 1. Do not use in saline soil</p> <p>2. Do not contact oily substances or soak in oil for a long time,</p> <p>3. Long time exposed under sunshine is not recommended</p>	

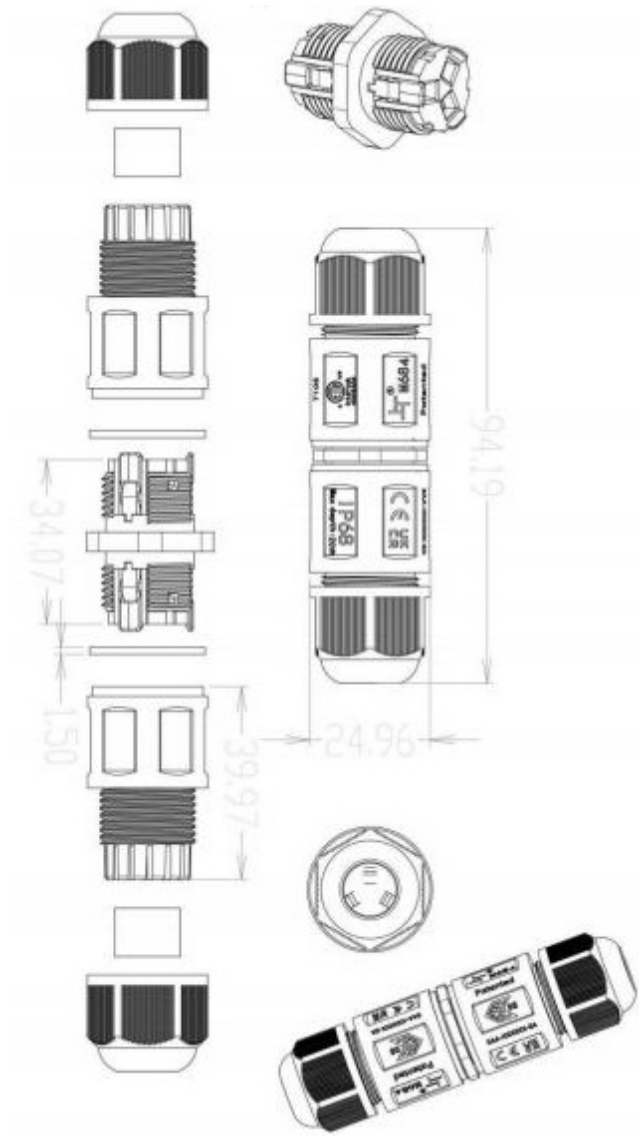




## Wiring steps



1. open the nut cover at both end sides,  
Take out the quick connector

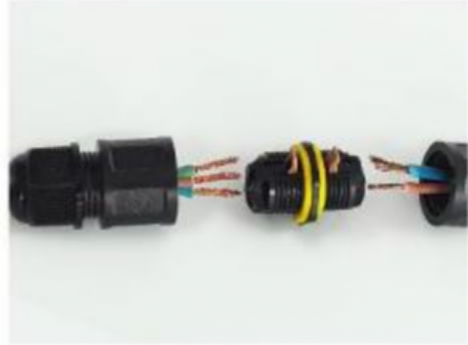

2. Thread the cable through the nut  
body and pull up the buckle



3. Connect the wires to the 3 core pressed terminal correspondantly, press the levers



4. Twist and tighten the cable glands